


Software update via SD card:

The software update via SD-card consists of two parts, the preparation of the SD-card at the PC (see 1. At the PC) and the update at the feeder (see 2. At the automatic feeder).


1. At the PC:

1. Insert the SD card into the PC slot.
2. Download the software from the Förster-Technik website www.foerster-technik.de:
 - 2.1. Therefore chose **service** at the website and enter the **dealer area**.
 - 2.2. Open **Software updates** in the menu at the left and chose **SD-Card**.

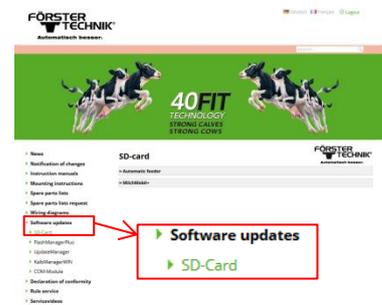


- 2.3. Choose the menu point **Automatic feeder** at the right site and click on the link **ZIP-file**.

3. Save the file on the desktop.
4. With the right mouse button click on the ZIP-file.
5. Choose **Extract All...**
6. Click on **Browse...** and choose the SD-card. Confirm your choice by clicking on **OK**. Click on **Extract** to unzip the file to the SD-card.

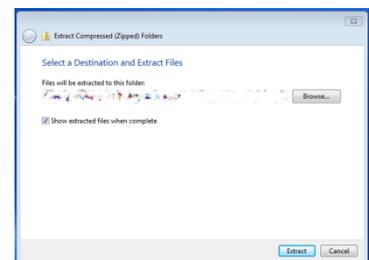

7. The shown structure on the right is now extracted to the SD card. Please do NOT change the structure!



2. At the automatic feeder:

Hint:

As the SD-card update is done via the CAN Bus connection, all available, active CAN devices are update. If only one device as to be updated (e.g.: because of mal function), all other devices have to be disconnected from the power supply.

1. Data backup

- 1.1. Insert an **empty** SD card into the slot of the handheld.
- 1.2. Save data via **Main menu> Device data> Data backup> SD card> save?** and remove the SD-card afterwards



2. Update

- 1.1. **Switch off** the feeder. Press the **book button** and hold it while the feeder is **switched on**. Hold it until the **Setup menu** appears.
- 1.2. Insert the **SD card** with **the update files** into the slot of the handheld.
- 1.3. The feeder starts the update automatically (see the screen on the right). Wait and don't push any further buttons.



- 1.4. The message shown on the right is displayed as soon as the update has been completed.



- 1.5. Press the **Enter button** to continue.



- 1.6. **Remove** the SD card and press the **Enter button** again.



Notes:

The previously taken data backup is taken as security if mal functions turn up while the update is done.