
	Mounting Instructions Cleaning Sponge Injector at Hose Cleaning Gun	
	Re: Cleaning Sponge Injector	
	Date May 2002	
Page 1 of 2	New Equipment and Retrofitting	


Cleaning Sponge Injector at Hose Cleaning Gun

Usage


The cleaning sponge injector facilitates easy and thorough removal of tenacious deposits in the cleaning overflow pipe in the mixer jar and in the suction hoses. **By this means even long suction hoses will be cleaned perfectly.**

Mounting the Cleaning Sponge Injector at the Hose Cleaning Gun

Mount the quick coupling at the bibcock (3/4"-connection at the faucet), at the hose cleaning gun or at the udder spray with 3/4" external thread.

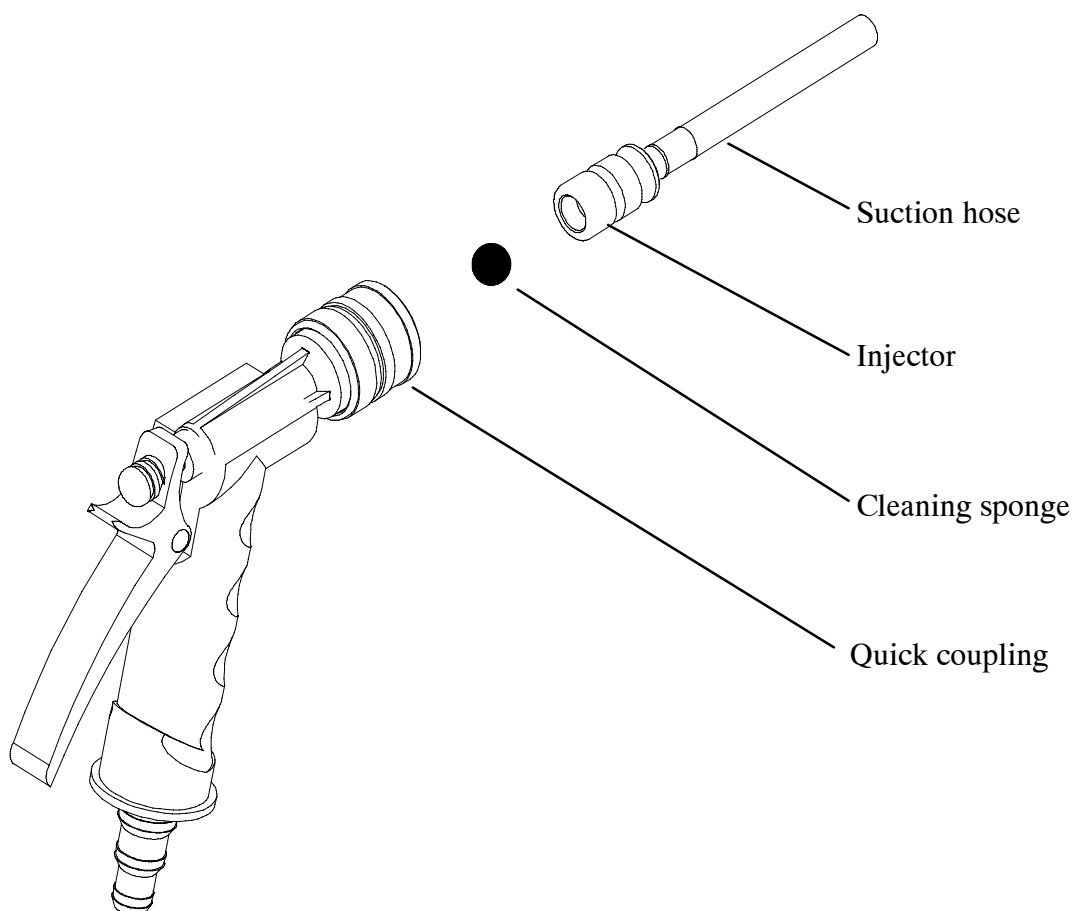

Note: The solenoid valves resp. the pressure sensors and the pump have to be cleaned solely with clear water. Never use the cleaning sponge because it may lead to clogging thus damaging the above-mentioned components!

Förster Technik® M12.1e	Mounting Instructions Cleaning Sponge Injector at Hose Cleaning Gun	
	Re: Cleaning Sponge Injector	
	Date May 2002	
Page 2 of 2	New Equipment and Retrofitting	

1. Insert a cleaning sponge that has been previously imbued in detergent, into the injector and mount it on the quick coupling.
2. Take the suction hose off the feeding station and the mixer resp. the valve unit and put it on the injector.
3. Convey the cleaning sponge through the suction hose by water pressure. Hold the suction hose on the nozzle.
4. Rinse with abundant water and reconnect the suction hose.
5. The overflow pipe of the mixer can also be easily cleaned with clear water without cleaning sponge.
6. In case of tenacious deposits in the overflow pipe, use the cleaning sponge as for the suction hoses.